


CB-BJZ 齿轮泵电机组(卧式)

一、外形及安装尺寸

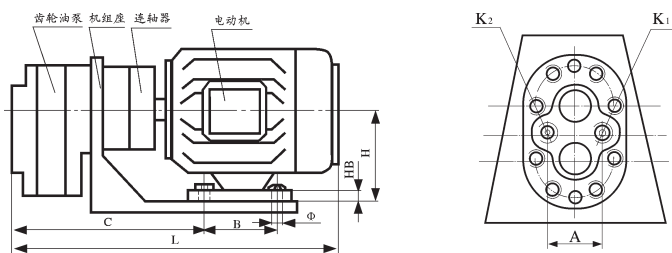


二、技术参数

型号	C	L	A	B	Φ	HB	H	进油口K ₁	出油口K ₂	电动机	电机功率 kw	
CB-B2.5JZ			35	80	7	10	63	Z ³ / ₈ "	Z ³ / ₈ "	YS7114	0.25	
CB-B4JZ	160	347					71			YS7124	0.37	
CB-B6JZ	164	351		90			YS8014			0.55		
CB-B10JZ	178	359	50	100	10	12	90	Z ³ / ₄ "	Z ³ / ₄ "	Y90S-4-B3	1.1	
CB-B16JZ	212	416									Y90L-4-B3	1.5
CB-B20JZ	216	420		125								
CB-B25JZ	220	449	55	140	10	14	100	Z1"	Z ³ / ₄ "	Y100L-4-B3	2.2	
CB-B32JZ	226	455									Y100L2 ₁ -4-B3	3
CB-B40JZ	243	500		15						112	Y112M-4-B3	4
CB-B50JZ	249	506	65	140	12	18	132	Z1 ¹ / ₄ "	Z1"	Y132S-4-B3	5.5	
CB-B63JZ	262	532									Y132M-4-B3	7.5
CB-B80JZ	315	621		178								
CB-B100JZ	322	628										
CB-B125JZ	331	677										

BB-BJZ 摆线齿轮泵电机组(立卧式)

一、外形及安装尺寸

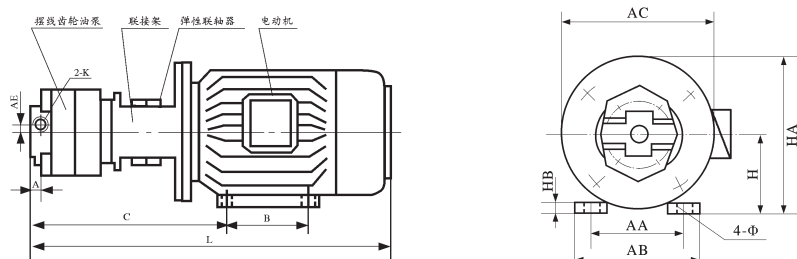

二、技术参数

型号	A	B	C	AA	AB	AC	AE	H	HA	HB	K	Φ	L	电动机	
BB-B4JZ	14	80	171	100	125	130	2	71	130	9	Z ³ / ₈ "	9	325	YS7114	
BB-B6JZ		199	112	80				150	379				YS7124		
BB-B10JZ		208	137	150				388	YS8014						
BB-B16JZ	20	100	243	140	180	200	3	90	190	12	Z ³ / ₄ "	10	447	Y90S-4-B35	
BB-B20JZ		247												451	
BB-B25JZ		252												481	Y90L-4-B35
BB-B32JZ	125	259										488			
BB-B40JZ	22	140	280	160	205	205	4	100	245	14	Z1"	10	537	Y100L ₁ -4-B35	
BB-B50JZ		285			542	Y100L2 ₁ -4-B35									
BB-B63JZ		299	190	245	230	112		265	15	Z ³ / ₄ "	561		Y112M-4-B35		
BB-B80JZ	27	140	350	216	280	270	5	132	315	18	Z1 ¹ / ₄ "	12	656	Y132S-4-B35	
BB-B100JZ		357												663	
BB-B125JZ		366												712	Y132M-4-B35

备注：1、S型输油泵，以及CB-Fc(A)电机组尺寸与本页基本相同。 2、电机功率变动或使用防爆电机时，订货时请注明。
3、用户在使用中，系统压力如低于2.5MPa时，电机功率可相应减小，订货时请说明。